



TR3-C20C1

KOE



Item No.	Color	Kelvin	Beam angle
TR3-C20C1	SBK	3000K,4000K	24°
TR3-C20C1	SWH	3000K,4000K	24°

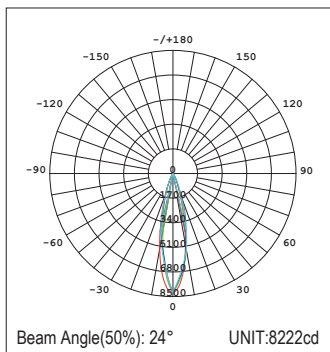

Flux out:811.6 lm			
Height	Eavg,Emax	Angle:24°	Diameter
1m	5256,8222lx		43.12cm
2m	1314,2056lx		86.24cm
3m	584,0,913.6lx		129.36cm
4m	328,5,513.9lx		172.48cm
5m	210,2,328.9lx		215.60cm
6m	146,0,228.4lx		258.72cm
7m	107,3,167.8lx		301.84cm
8m	82,13,128.5lx		344.96cm
9m	64,89,101.5lx		388.08cm
10m	52,56,82.22lx		431.20cm

CRI
>90

UGR
<10

350°
90°

COB
50000hrs

General information:	
Item No.	TR3-C20C1
Product family code	LED Track Light
Installation type	fixed
Adjustable	rotatable 350°, adjustable 90°
Housing material	aluminum
IP code	IP20
Safety class	class I
Connection	track connection
Ambient temperature	0 to +35°C
Expected lifetime	L80B10/50000H, Ta=25°C
Light technical:	
Input	AC230V
Type of lamps	COB
Number of lamps	1
Rated power	21W
Color consistency	<3
Color rendering index(CRI)	>90
Lamp color temperature	3000K,4000K
LED luminous flux	2150lm@3000K
Light luminous flux	1830lm@3000K
Beam angle	24°
Light intensity@3000K	8222cd
Electrical:	
Power supply	11B4-24352S-B00-0 (DC180mA), external
Total power	21W
Power supply included	Yes
Supply voltage	AC230V
Line frequency	50-60Hz
Safety class	class I
Dimmable	No
Power factor	0.5
Flicker	<5%