



TR3-C30C1

KOE



Item No.	Color	Kelvin	Beam angle
TR3-C30C1	SBK	3000K,4000K	24°
TR3-C30C1	SWH	3000K,4000K	24°

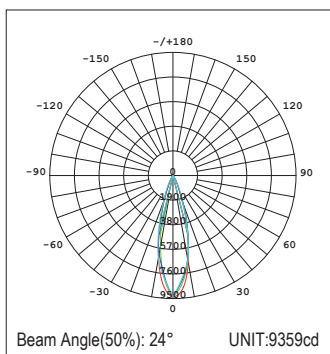

Flux out:1206 lm			
Height	Eavg,Emax	Angle:24°	Diameter
1m	6173,9359lx		49.15cm
2m	1543,2340lx		98.30cm
3m	685.9,1040lx		147.45cm
4m	385.8,584.9lx		196.60cm
5m	246.9,374.4lx		245.76cm
6m	171.5,260.0lx		294.91cm
7m	126.0,191.0lx		344.06cm
8m	96.45,146.2lx		393.21cm
9m	76.21,115.5lx		442.36cm
10m	61.73,93.59lx		491.51cm

CRI
>90

UGR
<10

350°
90°

COB
50000hrs

General information:	
Item No.	TR3-C30C1
Product family code	LED Track Light
Installation type	fixed
Adjustable	rotatable 350°, adjustable 90°
Housing material	aluminum
IP code	IP20
Safety class	class I
Connection	track connection
Ambient temperature	0 to +35°C
Expected lifetime	L80B10/50000H, Ta=25°C
Light technical:	
Input	AC230V
Type of lamps	COB
Number of lamps	1
Rated power	28.5W
Color consistency	<3
Color rendering index(CRI)	>90
Lamp color temperature	3000K,4000K
LED luminous flux	2850lm@3000K
Light luminous flux	2420lm@3000K
Beam angle	24°
Light intensity@3000K	9359cd
Electrical:	
Power supply	11B4-24352S-B00-0 (DC240mA), external
Total power	28.5W
Power supply included	Yes
Supply voltage	AC230V
Line frequency	50-60Hz
Safety class	class I
Dimmable	No
Power factor	0.5
Flicker	<5%