Track light TR2

KOE

UGR <19

24° UGR <16

36° UGR <19

TR2-A10





TR2-A20




TR2-A30









350° 90°

IP20

L80B10 50000H

Item No.	TR2-A10	TR2-A20	TR2-A30
Material	Aluminum	Aluminum	Aluminum
Color rendering index	CRI90	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°	24°, 36°
Input	AC230V	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K	3000K, 4000K
Rated power	10W	21W	28.5W
LED luminous flux	1130lm@3000K	2150lm@3000K	2850lm@3000K
Light luminous flux	900lm@3000K	1830lm@3000K	2420lm@3000K
Lumen efficiency	90lm/W	87lm/W	85lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D45 H100	D60 H150	D80 H170

Track light TR2

KOE

UGR <19

24° UGR <16

36° UGR <19

TR2-B10





TR2-B20




TR2-B30









350° 90°

IP20

L80B10 50000H

Item No.	TR2-B10	TR2-B20	TR2-B30
Material	Aluminum	Aluminum	Aluminum
Color rendering index	CRI90	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°	24°, 36°
Input	AC230V	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K	3000K, 4000K
Rated power	10W	21W	28.5W
LED luminous flux	1130lm@3000K	2150lm@3000K	2850lm@3000K
Light luminous flux	900lm@3000K	1830lm@3000K	2420lm@3000K
Lumen efficiency	90lm/W	87lm/W	85lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D50 H120	D60 H135	D80 H150

Track light TR2

KOE

UGR <19

24° UGR <10

36° UGR <13

TR2-C10





TR2-C20




TR2-C30









350° 90°

IP20

L80B10 50000H

Item No.	TR2-C10	TR2-C20	TR2-C30
Material	Aluminum	Aluminum	Aluminum
Color rendering index	CRI90	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°	24°, 36°
Input	AC230V	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K	3000K, 4000K
Rated power	10W	20W	28.5W
LED luminous flux	1130lm@3000K	2040lm@3000K	2850lm@3000K
Light luminous flux	900lm@3000K	1750lm@3000K	2420lm@3000K
Lumen efficiency	90lm/W	88lm/W	85lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D54 H125	D63 H156	D76 H180

Track light TR2

24° UGR <16


36° UGR <19


TR2B-A30



TR2B-B30







350° 90°

IP20

L80B10 50000H

Item No.	TR2B-A30	TR2B-B30
Material	Aluminum	Aluminum
Color rendering index	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°
Input	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K
Rated power	28.5W	28.5W
LED luminous flux	2850lm@3000K	2850lm@3000K
Light luminous flux	2420lm@3000K	2420lm@3000K
Lumen efficiency	85lm/W	85lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D80 H170	D80 H150

Track light TR2

24° UGR <10


36° UGR <13


TR2B-C20



TR2B-C30







350° 90°

IP20

L80B10 50000H

Item No.	TR2B-C20	TR2B-C30
Material	Aluminum	Aluminum
Color rendering index	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°
Input	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K
Rated power	20W	28.5W
LED luminous flux	2040lm@3000K	2850lm@3000K
Light luminous flux	1750lm@3000K	2420lm@3000K
Lumen efficiency	88lm/W	85lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D63 H156	D76 H180

Track light TR2

KOE


UGR <10


TR2-GR10




TR2-LN10









Item No.	TR2-GR10	TR2-LN10
Material	Aluminum	Aluminum
Color rendering index	CRI90	CRI90
Beam angle	15°	110°
Input	AC230V	AC230V
CCT	2700K, 3000K	2700K, 3000K
Rated power	11.5W	11.5W
LED luminous flux	1060lm@3000K	940lm@3000K
Light luminous flux	730lm@3000K	630lm@3000K
Lumen efficiency	63lm/W	55lm/W
Expected lifetime	L70B30/50000H,Ta=25°C	L70B30/50000H,Ta=25°C
Size	D111 H23.5	D111 H23.5

Track light TR2


24° UGR <13


38° UGR <16


TR2-S10B



TR2B-S10B

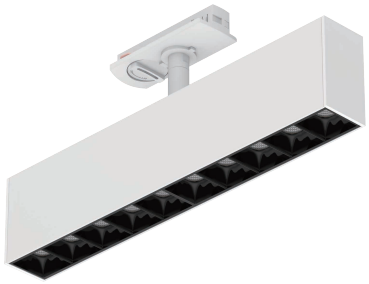





350° 90°

IP20

L70B30 50000H

Item No.	TR2-S10B	TR2B-S10B
Material	Aluminum	Aluminum
Color rendering index	CRI90	CRI90
Beam angle	24°, 38°	24°, 38°
Input	AC230V	AC230V
CCT	2700K, 3000K	2700K, 3000K
Rated power	18W	18W
LED luminous flux	1700lm@3000K	1700lm@3000K
Light luminous flux	1280lm@3000K	1280lm@3000K
Lumen efficiency	71lm/W	71lm/W
Expected lifetime	L70B30/50000H,Ta=25°C	L70B30/50000H,Ta=25°C
Size	270x33x60	270x33x60

Track light TR2


24° UGR <13


38° UGR <16

TR2-GR15B



TR2-LN25B

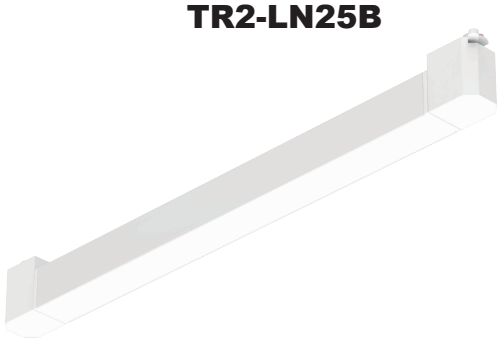

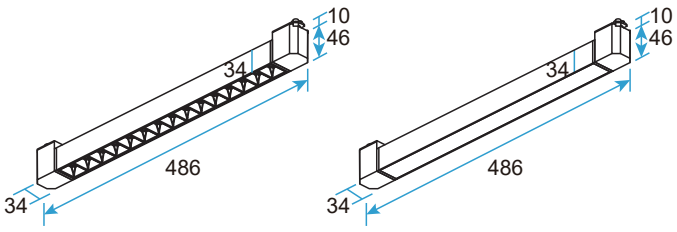

25°

IP20

L70B30
50000H

Item No.	TR2-GR15B	TR2-LN25B
Material	Aluminum	Aluminum
Color rendering index	CRI90	CRI90
Beam angle	24°, 38°	120°
Input	AC230V	AC230V
CCT	2700K, 3000K	2700K, 3000K
Rated power	25W	25W
LED luminous flux	2400lm@3000K	2700lm@3000K
Light luminous flux	1810lm@3000K	1810lm@3000K
Lumen efficiency	72lm/W	72lm/W
Expected lifetime	L70B30/50000H,Ta=25°C	L70B30/50000H,Ta=25°C
Size	486x34x56	486x34x56

Track TR2

KOE





TR2-HE
Head & end cap
Max. 10A
L107.5 W34 H22.5



TR2-I
Connector I
Max. 10A
L80 W34 H22.5



TR2-F
Connector F
Max. 10A
L284 W34 H22.5



TR2-L
Connector L
Max. 10A
L70 W70 H22.5



TR2-T
Connector T
Max. 10A
L106 W70 H22.5



TR2-X
Connector X
Max. 10A
L106 W106 H22.5



TR2-D-6
Adaptor for 2 wire track,
with hollow screw
L83 W32 H20

Track light TR3

KOE

UGR <19

24° UGR <16

36° UGR <19

TR3-A10





TR3-A20




TR3-A30









350° 90°

IP20

L80B10 50000H

Item No.	TR3-A10	TR3-A20	TR3-A30
Material	Aluminum	Aluminum	Aluminum
Color rendering index	CRI90	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°	24°, 36°
Input	AC230V	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K	3000K, 4000K
Rated power	10W	21W	28.5W
LED luminous flux	1130lm@3000K	2150lm@3000K	2850lm@3000K
Light luminous flux	900lm@3000K	1830lm@3000K	2420lm@3000K
Lumen efficiency	90lm/W	87lm/W	85lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D45 H100	D60 H150	D80 H170

Track light TR3

KOE

UGR <19

24° UGR <16

36° UGR <19

TR3-B10





TR3-B20




TR3-B30









350° 90°

IP20

L80B10 50000H

Item No.	TR3-B10	TR3-B20	TR3-B30
Material	Aluminum	Aluminum	Aluminum
Color rendering index	CRI90	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°	24°, 36°
Input	AC230V	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K	3000K, 4000K
Rated power	10W	21W	28.5W
LED luminous flux	1130lm@3000K	2150lm@3000K	2850lm@3000K
Light luminous flux	900lm@3000K	1830lm@3000K	2420lm@3000K
Lumen efficiency	90lm/W	87lm/W	85lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D50 H120	D60 H135	D80 H150

Track light TR3

KOE

UGR <19

24° UGR <10

36° UGR <13

TR3-C10





TR3-C20




TR3-C30









350° 90°

IP20

L80B10 50000H

Item No.	TR3-C10	TR3-C20	TR3-C30
Material	Aluminum	Aluminum	Aluminum
Color rendering index	CRI90	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°	24°, 36°
Input	AC230V	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K	3000K, 4000K
Rated power	10W	20W	28.5W
LED luminous flux	1130lm@3000K	2040lm@3000K	2850lm@3000K
Light luminous flux	900lm@3000K	1750lm@3000K	2420lm@3000K
Lumen efficiency	90lm/W	88lm/W	85lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D54 H125	D63 H156	D76 H180

Track light TR3

24° UGR <16


36° UGR <19


TR3B-A30



TR3B-B30







350° 90°

IP20

L80B10 50000H

Item No.	TR3B-A30	TR3B-B30
Material	Aluminum	Aluminum
Color rendering index	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°
Input	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K
Rated power	28.5W	28.5W
LED luminous flux	2850lm@3000K	2850lm@3000K
Light luminous flux	2420lm@3000K	2420lm@3000K
Lumen efficiency	85lm/W	85lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D80 H170	D80 H150

Track light TR3

24° UGR <10


36° UGR <13


TR3B-C20



TR3B-C30







350° 90°

IP20

L80B10 50000H

Item No.	TR3B-C20	TR3B-C30
Material	Aluminum	Aluminum
Color rendering index	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°
Input	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K
Rated power	20W	28.5W
LED luminous flux	2040lm@3000K	2850lm@3000K
Light luminous flux	1750lm@3000K	2420lm@3000K
Lumen efficiency	88lm/W	85lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D63 H156	D76 H180

Track light TR3


UGR <10


TR3-GR10



TR3-LN10







350° 90°

IP20

L70B30 50000H

Item No.	TR3-GR10	TR3-LN10
Material	Aluminum	Aluminum
Color rendering index	CRI90	CRI90
Beam angle	15°	110°
Input	AC230V	AC230V
CCT	2700K, 3000K	2700K, 3000K
Rated power	11.5W	11.5W
LED luminous flux	1060lm@3000K	940lm@3000K
Light luminous flux	730lm@3000K	630lm@3000K
Lumen efficiency	63lm/W	55lm/W
Expected lifetime	L70B30/50000H,Ta=25°C	L70B30/50000H,Ta=25°C
Size	D111 H23.5	D111 H23.5

Track light TR3


24° UGR <13


38° UGR <16


TR3-S10B



TR3B-S10B

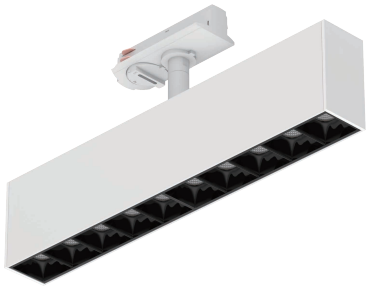





350° 90°

IP20

L70B30 50000H

Item No.	TR3-S10B	TR3B-S10B
Material	Aluminum	Aluminum
Color rendering index	CRI90	CRI90
Beam angle	24°, 38°	24°, 38°
Input	AC230V	AC230V
CCT	2700K, 3000K	2700K, 3000K
Rated power	18W	18W
LED luminous flux	1700lm@3000K	1700lm@3000K
Light luminous flux	1280lm@3000K	1280lm@3000K
Lumen efficiency	71lm/W	71lm/W
Expected lifetime	L70B30/50000H,Ta=25°C	L70B30/50000H,Ta=25°C
Size	270x33x60	270x33x60

Track light TR3


24° UGR <13


38° UGR <16

TR3-GR15B



TR3-LN25B

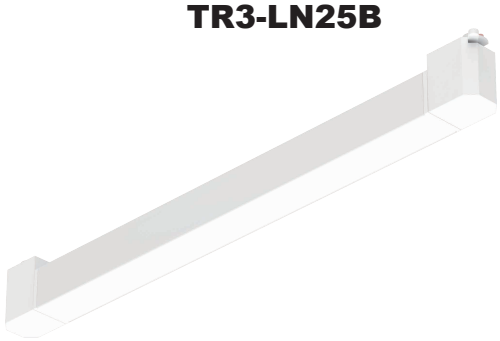

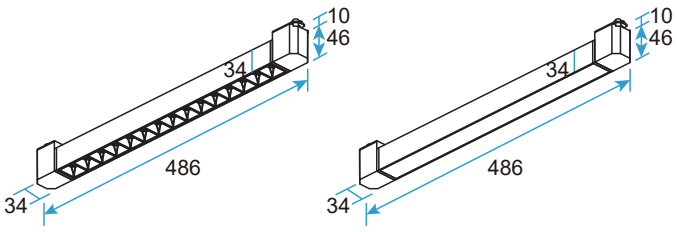

25°

IP20

L70B30
50000H

Item No.	TR3-GR15B	TR3-LN25B
Material	Aluminum	Aluminum
Color rendering index	CRI90	CRI90
Beam angle	24°, 38°	120°
Input	AC230V	AC230V
CCT	2700K, 3000K	2700K, 3000K
Rated power	25W	25W
LED luminous flux	2400lm@3000K	2700lm@3000K
Light luminous flux	1810lm@3000K	1810lm@3000K
Lumen efficiency	72lm/W	72lm/W
Expected lifetime	L70B30/50000H,Ta=25°C	L70B30/50000H,Ta=25°C
Size	486x34x56	486x34x56

Track TR3

KOE





TR3-HE
Head & end cap
Max. 10A
L109 W34 H27



TR3-F
Connector F
Max. 10A
L270 W36 H27



TR3-I
Connector I
Max. 10A
L79 W34 H24



TR3-I2
Connector I
Max. 10A
L108.5 W36 H27



TR3-T
Connector T
Max. 10A
L180 W103 H27



TR3-X
Connector X
Max. 10A
L180 W180 H27



TR3-L
Connector L
Max. 10A
L108 W108 H27



TR3-D-6
Adaptor for 3 wire track,
with hollow screw
L83 W32 H20