Track light TR4

KOE

UGR <19

24° UGR <16

36° UGR <19

TR4-A10





TR4-A20




TR4-A30









350° 90°

IP20

L80B10 50000H

Item No.	TR4-A10	TR4-A20	TR4-A30
Material	Aluminum	Aluminum	Aluminum
Color rendering index	CRI90	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°	24°, 36°
Input	AC230V	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K	3000K, 4000K
Rated power	10W	21W	28W
LED luminous flux	1130lm@3000K	2150lm@3000K	2800lm@3000K
Light luminous flux	900lm@3000K	1830lm@3000K	2380lm@3000K
Lumen efficiency	90lm/W	87lm/W	85lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D45 H100	D60 H150	D80 H170

Track light TR4

KOE

UGR <19

24° UGR <16

36° UGR <19

TR4-B10





TR4-B20




TR4-B30









350° 90°

IP20

L80B10 50000H

Item No.	TR4-B10	TR4-B20	TR4-B30
Material	Aluminum	Aluminum	Aluminum
Color rendering index	CRI90	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°	24°, 36°
Input	AC230V	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K	3000K, 4000K
Rated power	10W	21W	28W
LED luminous flux	1130lm@3000K	2150lm@3000K	2800lm@3000K
Light luminous flux	900lm@3000K	1830lm@3000K	2380lm@3000K
Lumen efficiency	90lm/W	87lm/W	85lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D50 H120	D60 H135	D80 H150

Track light TR4

KOE

UGR <19

24° UGR <10

36° UGR <13

TR4-C10





TR4-C20




TR4-C30









350° 90°

IP20

L80B10 50000H

Item No.	TR4-C10	TR4-C20	TR4-C30
Material	Aluminum	Aluminum	Aluminum
Color rendering index	CRI90	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°	24°, 36°
Input	AC230V	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K	3000K, 4000K
Rated power	10W	21W	28W
LED luminous flux	1130lm@3000K	2150lm@3000K	2800lm@3000K
Light luminous flux	900lm@3000K	1830lm@3000K	2380lm@3000K
Lumen efficiency	90lm/W	87lm/W	85lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D54 H125	D63 H156	D76 H180


Track light TR4

24° UGR <13

38° UGR <16

TR4-S10B





350° 90°

IP20

L70B30 50000H

Item No.	TR4-S10B
Material	Aluminum
Color rendering index	CRI90
Beam angle	24°, 38°
Input	AC230V
CCT	2700K, 3000K
Rated power	27W
LED luminous flux	1950lm@3000K
Light luminous flux	1500lm@3000K
Lumen efficiency	56lm/W
Expected lifetime	L70B30/50000H,Ta=25°C
Size	270x33x60

Track light TR4

KOE

24° UGR <16


36° UGR <19


TR4B-A15



TR4B-A20















Item No.	TR4B-A15	TR4B-A20
Material	Aluminum	Aluminum
Color rendering index	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°
Input	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K
Rated power	14.5W	21W
LED luminous flux	1460lm@3000K	2150lm@3000K
Light luminous flux	1240lm@3000K	1830lm@3000K
Lumen efficiency	86lm/W	87lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D60 H150	D80 H170

Track light TR4

24° UGR <16


36° UGR <19


TR4B-B15



TR4B-B20







350° 90°

IP20

L80B10 50000H

Item No.	TR4B-B15	TR4B-B20
Material	Aluminum	Aluminum
Color rendering index	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°
Input	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K
Rated power	14.5W	21W
LED luminous flux	1460lm@3000K	2150lm@3000K
Light luminous flux	1240lm@3000K	1830lm@3000K
Lumen efficiency	86lm/W	87lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D60 H135	D80 H150

Track light TR4

KOE

24° UGR <10


36° UGR <13


TR4B-C15



TR4B-C20







350° 90°

IP20

L80B10 50000H

Item No.	TR4B-C15	TR4B-C20
Material	Aluminum	Aluminum
Color rendering index	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°
Input	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K
Rated power	14.5W	21W
LED luminous flux	1460lm@3000K	2150lm@3000K
Light luminous flux	1240lm@3000K	1830lm@3000K
Lumen efficiency	86lm/W	87lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D63 H156	D76 H180

Track TR4





TR4-H
Head
Max. 10A
L99 W32 H32



TR4-E
End cap
Max. 10A
L32 W32 H32



TR4-I
Connector I
Max. 10A
L90 W33 H21



TR4-I2
Connector I2
Max. 10A
L166 W32 H32




TR4-F
Connector F
Max. 10A
L235 W32 H32



TR4-L
Connector L
Max. 10A
L97 W97 H32




TR4-T
Connector T
Max. 10A
L163 W97 H32



TR4-X
Connector X
Max. 10A
L163 W163 H32



TR4-D2-6
Adaptor for 4 wire track,
with hollow screw
For female-thread swivel
L71 W32 H47



TR4-D2
Adaptor for 4 wire track
For male-thread swivel
L71 W32 H41

Track TR4



PD-TR4-1
Also compatible with TR6



PD-TR4-2
Also compatible with TR6



CLAMP-TR4-1
Also compatible with TR6



PD-TR4-3
Also compatible with TR6




CLAMP-TR4-3
Also compatible with TR6




CLAMP-TR4
Also compatible with TR6

Connectors TR4


KOE




TR4-HL



TR4-HR




TR4-E




TR4-I




TR4-I2




TR4-LI




TR4-LO

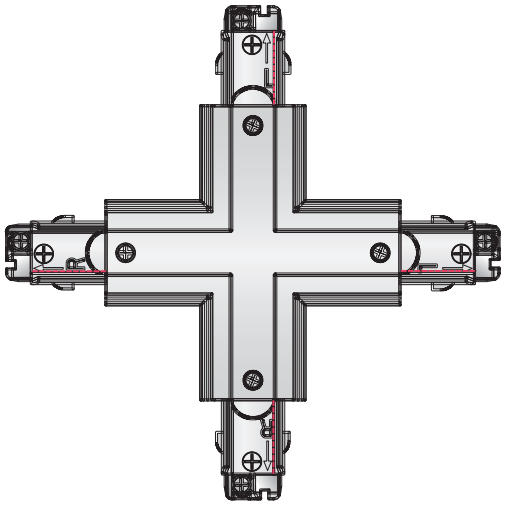

TR4-X

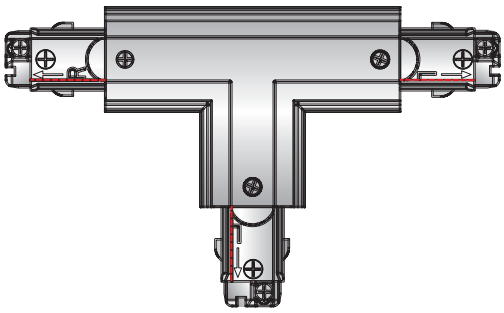

TR4-TL

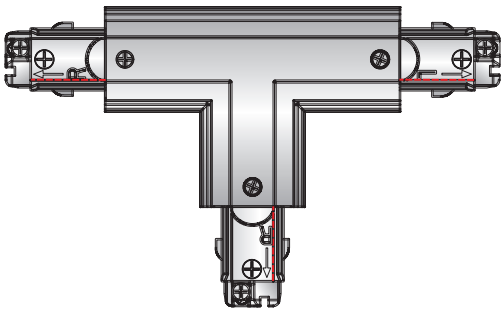

TR4-TR

