

NATTA

KOE

KP802



KP803

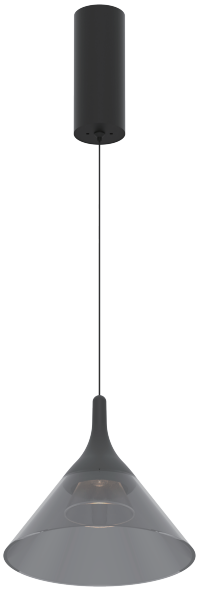

IP20 L80B10 50000H

Item No.	KP802	KP803
Material	Aluminum+Acrylic	Aluminum+Acrylic
Color rendering index	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°
Input	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K
LED power	6W	6W
Power with driver	7.4W	7.4W
LED luminous flux	760lm@3000K	760lm@3000K
Light luminous flux	510lm@3000K	600lm@3000K
Lumen efficiency	69lm/W	81lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D100 H110	D195 H175

NATTA

KOE

KP804



KP805



IP20 L80B10 50000H

Item No.	KP804	KP805
Material	Aluminum+Acrylic	Aluminum+Acrylic
Color rendering index	CRI90	CRI90
Beam angle	24°, 36°	24°, 36°
Input	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K
LED power	6W	6W
Power with driver	7.4W	7.4W
LED luminous flux	760lm@3000K	760lm@3000K
Light luminous flux	640lm@3000K	610lm@3000K
Lumen efficiency	86lm/W	82lm/W
Expected lifetime	L80B10/50000H,Ta=25°C	L80B10/50000H,Ta=25°C
Size	D72 H110	D62 H88

NATTA

KOE

KP811



KP812




IP20 L70B30 50000H

Item No.	KP811	KP812
Material	Aluminum	Aluminum
Color rendering index	CRI90	CRI90
Beam angle	24°	24°
Input	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K
LED power	6W	6W
Power with driver	7.4W	7.4W
LED luminous flux	730lm@3000K	730lm@3000K
Light luminous flux	500lm@3000K	500lm@3000K
Lumen efficiency	68lm/W	68lm/W
Expected lifetime	L70B30/50000H,Ta=25°C	L70B30/50000H,Ta=25°C
Size	D70 H100	D85 H75

NATTA

KOE

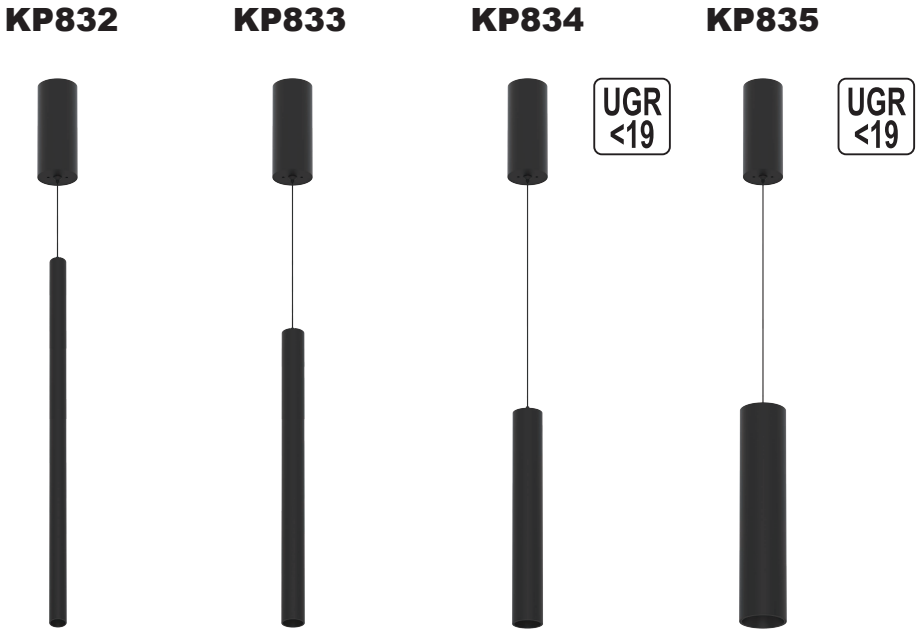

IP20

Item No.	KP832	KP833	KP834	KP835
Material	Steel	Aluminum	Aluminum	Aluminum
Color rendering index	CRI90	CRI90	CRI90	CRI90
Beam angle	60°	36°	24°, 36°	24°, 36°
Input	AC230V	AC230V	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K	3000K, 4000K	3000K, 4000K
LED power	2.1W	5.2W	6W	6W
Power with driver	3W	6.5W	7.4W	7.4W
LED luminous flux	210lm@3000K	600lm@3000K	760lm@3000K	760lm@3000K
Light luminous flux	140lm@3000K	460lm@3000K	650lm@3000K	650lm@3000K
Lumen efficiency	47lm/W	71lm/W	88lm/W	88lm/W
Expected lifetime	L70B30/50000H, Ta=25°C	L80B10/50000H, Ta=25°C	L80B10/50000H, Ta=25°C	L80B10/50000H, Ta=25°C
Size	D20 H500	D30 H400	D40 H300	D55 H300

NATTA

KOE

KP834A



IP20


L80B10
50000H

Item No.	KP834A
Material	Aluminum
Color rendering index	CRI90
Beam angle	80°
Input	AC230V
CCT	3000K, 4000K
LED power	6W
Power with driver	7.4W
LED luminous flux	760lm@3000K
Light luminous flux	520lm@3000K
Lumen efficiency	70lm/W
Expected lifetime	L80B10/50000H,Ta=25°C
Size	D40 H300

NATTA

KOE

KP851

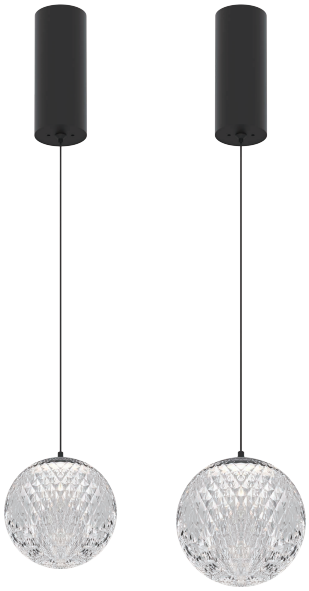

IP20


L70B30
50000H

Item No.	KP851M	KP851L
Material	Aluminum+Acrylic	Aluminum+Acrylic
Color rendering index	CRI90	CRI90
Beam angle	360°	360°
Input	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K
LED power	5.2W	6W
Power with driver	6.5W	7.4W
LED luminous flux	710lm@3000K	700lm@3000K
Light luminous flux	580lm@3000K	580lm@3000K
Lumen efficiency	89lm/W	78lm/W
Expected lifetime	L70B30/50000H,Ta=25°C	L70B30/50000H,Ta=25°C
Size	D95	D110

NATTA

KOE

KP852

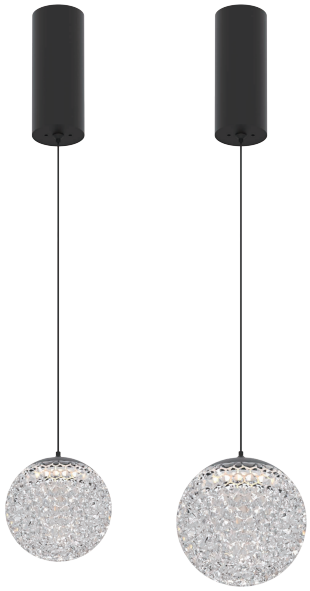

IP20


L70B30
50000H

Item No.	KP852M	KP852L
Material	Aluminum+Acrylic	Aluminum+Acrylic
Color rendering index	CRI90	CRI90
Beam angle	360°	360°
Input	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K
LED power	5.2W	6W
Power with driver	6.5W	7.4W
LED luminous flux	710lm@3000K	700lm@3000K
Light luminous flux	580lm@3000K	580lm@3000K
Lumen efficiency	89lm/W	78lm/W
Expected lifetime	L70B30/50000H,Ta=25°C	L70B30/50000H,Ta=25°C
Size	D90	D110

NATTA

KOE

KP853

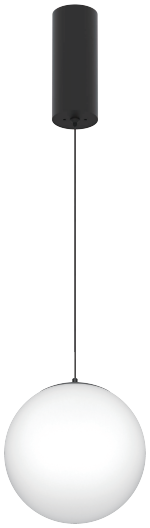

IP20


L70B30
50000H

Item No.	KP853
Material	Aluminum+Plastic
Color rendering index	CRI90
Beam angle	360°
Input	AC230V
CCT	3000K, 4000K
LED power	5.2W
Power with driver	6.5W
LED luminous flux	710lm@3000K
Light luminous flux	430lm@3000K
Lumen efficiency	66lm/W
Expected lifetime	L70B30/50000H,Ta=25°C
Size	D100

NATTA

KOE

KP854

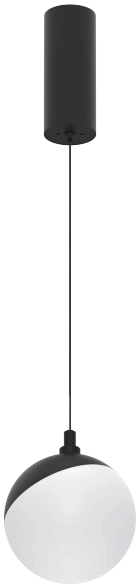

IP20


L70B30
50000H

Item No.	KP854
Material	Aluminum+Acrylic
Color rendering index	CRI90
Beam angle	150°
Input	AC230V
CCT	3000K, 4000K
LED power	6W
Power with driver	7.4W
LED luminous flux	720lm@3000K
Light luminous flux	590lm@3000K
Lumen efficiency	80lm/W
Expected lifetime	L70B30/50000H,Ta=25°C
Size	D95

NATTA

KOE

KP857

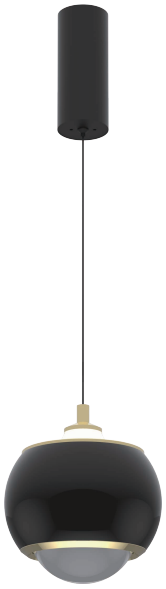

IP20

L80B10
50000H

Item No.	KP857
Material	Aluminum
Color rendering index	CRI90
Beam angle	60°
Input	AC230V
CCT	3000K, 4000K
LED power	6W
Power with driver	7.4W
LED luminous flux	760lm@3000K
Light luminous flux	500lm@3000K
Lumen efficiency	68lm/W
Expected lifetime	L80B10/50000H,Ta=25°C
Size	D100 H105


NATTA

KOE

KP859

15° UGR <13

55° UGR <16

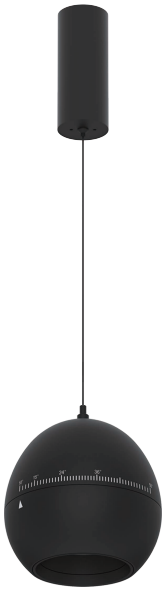

IP20

L80B10 50000H


Item No.	KP859
Material	Aluminum
Color rendering index	CRI90
Beam angle	15°- 55°
Input	AC230V
CCT	3000K, 4000K
LED power	6W
Power with driver	7.4W
LED luminous flux	820lm@3000K
Light luminous flux	580lm@3000K
Lumen efficiency	78lm/W
Expected lifetime	L80B10/50000H,Ta=25°C
Size	D100 H115

LINE

KOE


KP891-30

UGR <13

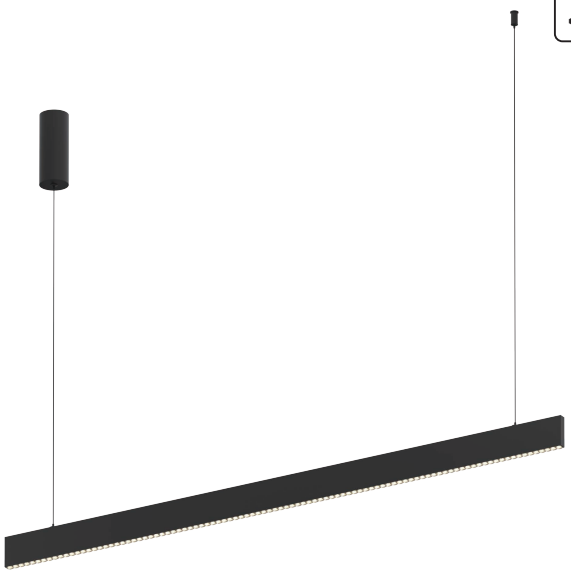

KP892-30

UGR <16

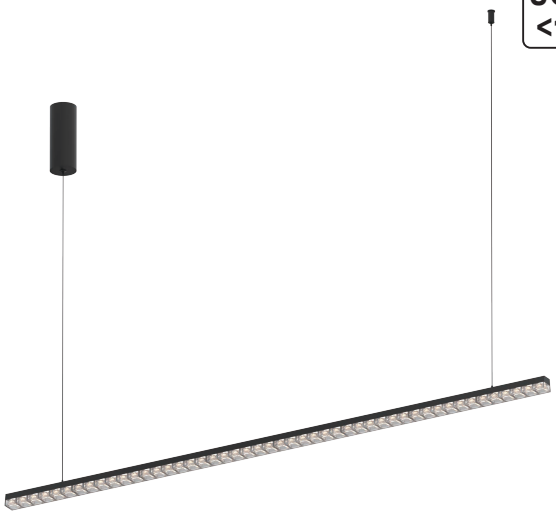

IP20

L70B30 50000H

Item No.	KP891-30	KP892-30
Material	Aluminum	Aluminum+Acrylic
Color rendering index	CRI90	CRI90
Beam angle	55°	45°
Input	AC230V	AC230V
CCT	3000K, 4000K	3000K, 4000K
LED power	25W	25W
Power with driver	29W	29W
LED luminous flux	2400lm@3000K	2400lm@3000K
Light luminous flux	2000lm@3000K	2000lm@3000K
Lumen efficiency	69lm/W	69lm/W
Expected lifetime	L70B30/50000H,Ta=25°C	L70B30/50000H,Ta=25°C
Size	L1180 W14 H60	L1254 W30 H28